


3832EC-A

- Soft close
- Load rating up to 36kg
- 100% extension
- 12.7mm slide thickness
- Front disconnect
- Hold-in
- Cam drawer adjust (3.2mm)

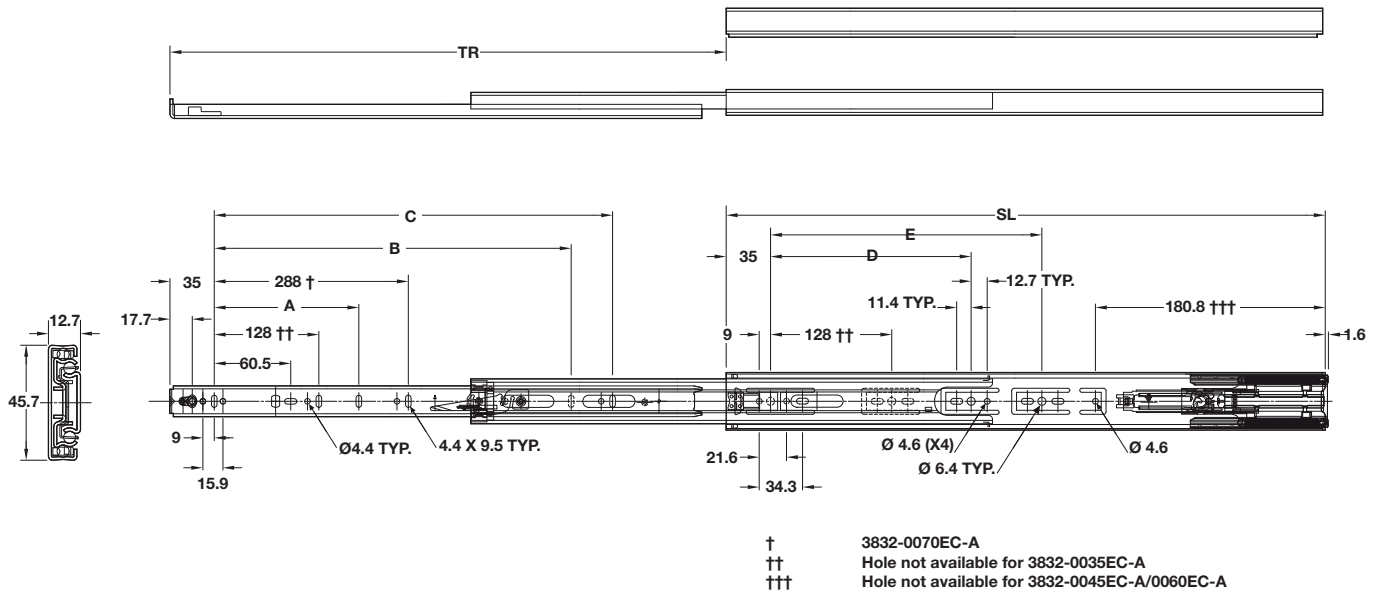

| 3832EC-A | mm | | | | | | |
|----------------|-----|-----|-----|-----|-----|-----|-----|
| | SL | TR | A | B | C | D | E |
| *3832-0035EC-A | 350 | 310 | - | 206 | - | - | - |
| *3832-0040EC-A | 400 | 406 | - | 257 | - | - | - |
| *3832-0045EC-A | 450 | 457 | - | 305 | - | 224 | - |
| *3832-0050EC-A | 500 | 508 | - | 320 | - | 224 | - |
| *3832-0055EC-A | 550 | 559 | - | 407 | 320 | 224 | - |
| *3832-0060EC-A | 600 | 610 | 224 | - | 416 | 224 | 352 |
| *3832-0065EC-A | 650 | 660 | 224 | - | 416 | 224 | 352 |
| *3832-0070EC-A | 700 | 711 | 224 | 416 | 544 | 224 | 352 |

* Prefix DZ for bright zinc plate, DB for black zinc plate, DW for white electro-plate

Notes:

- Fixing recommendation: 4mm wood screw / 6mm Euro screw
- Use for side (vertical) mount only
- Drawer width should not exceed slide length
- Not for lateral file drawer applications or where the drawer is wider than it is deep