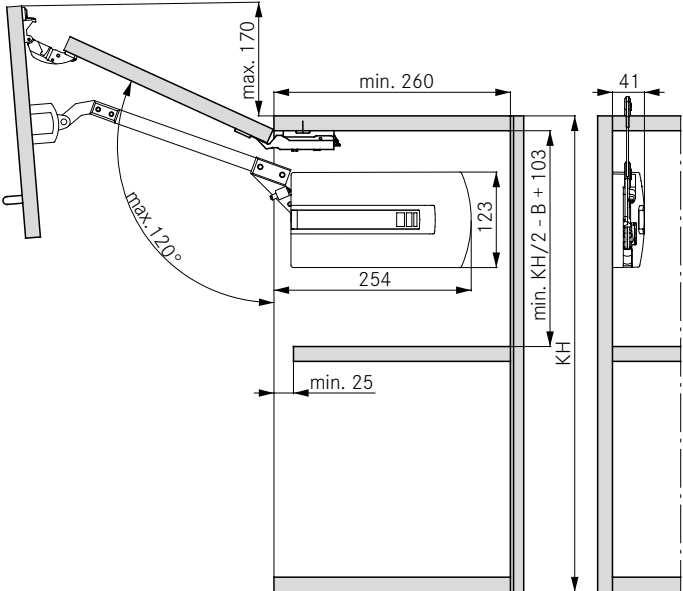
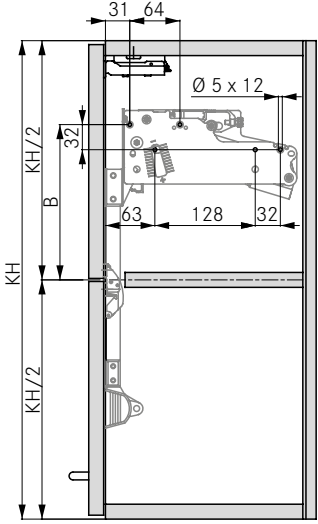
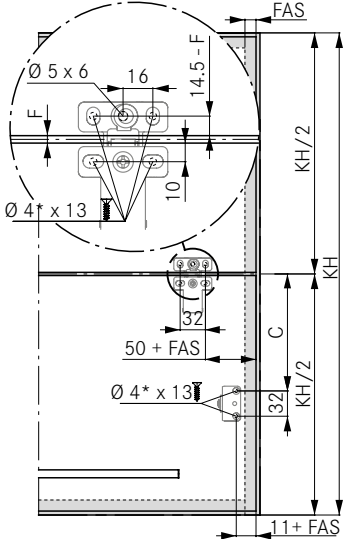


PLANNING INFORMATION

All dimensions in millimetres

Required space	Side wall drilling positions	Side wall Drilling clearance		
		KH	Type	B
		520 - 529	2	173
		530 - 539	2	158
		540 - 549	2	143
		550 - 559	2	128
		560 - 569	3	183
		570 - 579	3	168
		580 - 589	3	153
		590 - 599	3	138
		600 - 609	4	208
		610 - 619	4	198
		620 - 629	4	178
		630 - 639	4	168
		640 - 649	4	158
		650 - 699	5	225
		700 - 749	6	235
750 - 799	7	250		


Front installation for wooden and frame flaps (min. 45 mm width)	Front Drilling clearance		
	KH	Type	C
	520 - 529	2	133
	530 - 539	2	148
	540 - 549	2	163
	550 - 559	2	178
	560 - 569	3	145
	570 - 579	3	160
	580 - 589	3	175
	590 - 599	3	190
	600 - 609	4	138
	610 - 619	4	148
	620 - 629	4	168
	630 - 639	4	178
	640 - 649	4	188
	650 - 699	5	146
	700 - 749	6	156
750 - 799	7	166	

* Pre-drilling required Ø 2 mm

Number of hinges on top panel
From 900 mm cabinet width: 3 hinges. Hinges with spring require an opening angle of min. 120°

Calculation of flap weight
 Flap width x flap height x flap thickness x density ¹ + weight of handle ² = weight of flap
¹ Densities: MDF board 0.85 kg/dm³, chipboard 0.65 kg/dm³, spruce/pine 0.45 kg/dm³
² For bar handles, allow 0.1 kg per 100 mm of the handle length. We recommend a trial fitting

WARNING

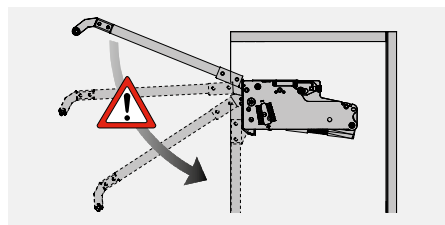

Caution!
Caution risk of injury!
Fitting is under spring tension!

LEGEND

B	Drilling dimension - side wall
C	Drilling dimension - front
F	Reveal
FAS	Front overlay, side
KH	Cabinet height