
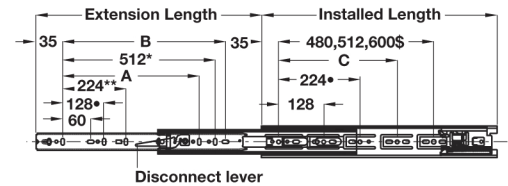
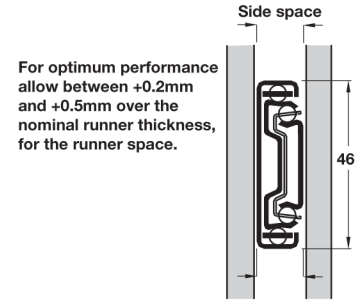


**Accuride 3832TR ball bearing touch release drawer runners**



- Not available on the 300mm length
- \* Only on 650 and 700 mm lengths
- \*\* Only on 550 mm lengths upwards

\$ 480 mm on 600 mm length  
 512 mm on 650 mm length  
 544 mm on 700 mm length

- > Full extension, telescopic, side mounted
- > Load carrying capacity upto 45 kg (see below for individual runner capacity)
- > Push on the drawer front to open or close the drawer
- > Opening mechanism activated by travel inward
- > Propels drawers open approximately 50-125 mm from the closed position
- > Hold-in feature holds the closed drawer in
- > Front disconnect (by depressing lever) for drawer removal
- > Cam drawer adjust feature
- > Please note maximum drawer width to be used
- > Zinc-plated steel
- > Order qty: 1 pair



Installed length 1	Ext. length 2	Max. drawer width	Load capacity	Dim. A	Dim. B	Dim. C	Bright	Black	White
<b>Accuride 3832-TR Touch Release</b>									
300 mm	305 mm	300 mm	42 kg	-	192 mm	-	422.04.335	422.04.336	422.04.337
350 mm	356 mm	350 mm	43 kg	-	242 mm	-	422.04.385	422.04.386	422.04.387
400 mm	406 mm	400 mm	44 kg	-	292 mm	288 mm	422.04.435	422.04.436	422.04.437
450 mm	457 mm	450 mm	45 kg	320 mm	342 mm	320 mm	422.04.485	422.04.486	422.04.487
500 mm	508 mm	500 mm	45 kg	320 mm	392 mm	384 mm	422.04.535	422.04.536	422.04.537
550 mm	559 mm	550 mm	45 kg	416 mm	442 mm	416 mm	422.04.585	422.04.586	422.04.587
600 mm	610 mm	600 mm	45 kg	416 mm	492 mm	352 mm	422.04.635	422.04.636	422.04.637
650 mm	660 mm	600 mm	44 kg	416 mm	542 mm	352 mm	422.04.685	422.04.686	422.04.687
700 mm	711 mm	600 mm	43 kg	416 mm	592 mm	352 mm	422.04.735	422.04.736	422.04.737
<b>Accuride 3832-HDTR Heavy Duty Touch Release</b>									
300 mm	305 mm	300 mm	42 kg	-	192 mm	-	422.97.830		
350 mm	356 mm	350 mm	42 kg	-	242 mm	-	422.97.835		
400 mm	406 mm	400 mm	44 kg	-	292 mm	288 mm	422.97.840		
450 mm	457 mm	450 mm	45 kg	320 mm	342 mm	320 mm	422.97.845		
500 mm	508 mm	500 mm	45 kg	320 mm	392 mm	384 mm	422.97.850		
550 mm	559 mm	550 mm	45 kg	416 mm	442 mm	416 mm	422.97.855		
600 mm	610 mm	600 mm	45 kg	416 mm	492 mm	352 mm	422.97.860		
650 mm	660 mm	600 mm	44 kg	416 mm	542 mm	352 mm	422.97.865		
700 mm	711 mm	600 mm	43 kg	416 mm	592 mm	352 mm	422.97.870		