

DATA SHEET : **FTSOFTCLOSE**

CAPACITY/DOOR :

60 KG

TRACK :


ALUMINIUM

MOVEMENT :


STRAIGHT

Wall fixing

SLIDING SYSTEM WITH AUTOMATIC CLOSING , WALL FIXING

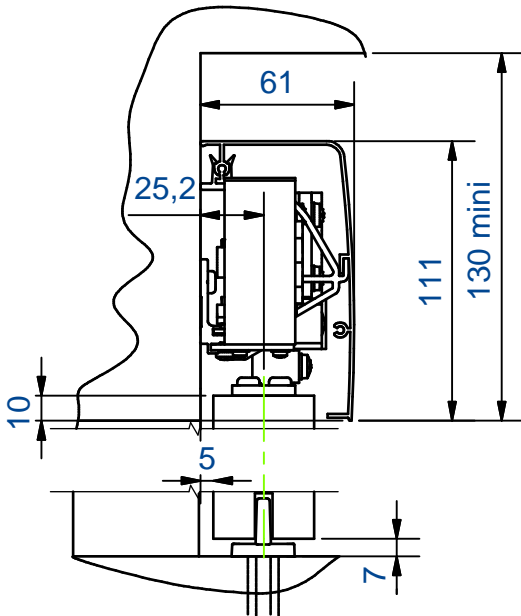


SOFTCLOSE Dimension

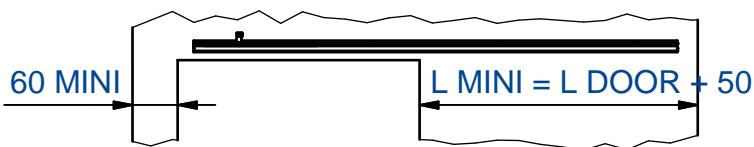


For standard openings: 700 / 800 / 900 / 1000 et 1450 mm:

Setting of plate and stop closing side

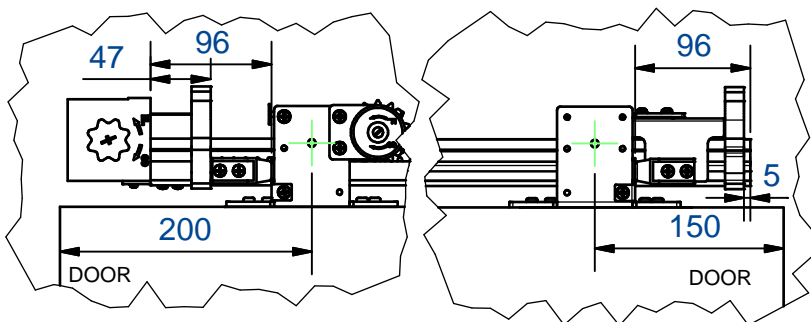

Setting of plate and stop opening side













Dimension to set the 1103R guide into the panel



TRACKS AND PELMETS

	Description	mm
	Aluminium Track 28,2 x 37 mm, drilled every 440 mm	1400
		1600
		1800
		2000
		2900
	Anodized aluminium Pelmet to clip on the track.	1500
		1700
		1900
		2100
		3000

SOFTCLOSE SET


	Description
	Softclose set for a door capacity of 60 KG
	2 hangers with smooth axles and plastic rollers and a set of stop reception right and left
	1 Rack brake
	1 Set with 1 rack and 2 sound-absorbing caps
	1 door drive with spiral spring and lock plate
	1 Set to keep the door open: support, plastic blade, support plate
	Set of 2 doors stops right and left
	2 Pelmets supports
	2 Stops for the rack
	Set of end caps for pelmet left and right
	Door guide

SOFTCLOSE

MINISPORT

SET

Description		Réf.	
Set for a door capacity 60 Kg:		SC-70	
1 Softclose set 21585			
1 Track 21580			
1 Pelmet 21592			
1 Set of pelmet end caps 20805/804			
1 Door guide 1103R			
2 Pelmet supports 21577		SC-80 SC-90 SC-100 SC-145	
2 stops for the rack 21579			
Dito with:			
Track 21581 and pelmet 21593			
Track 21582 and pelmet 21594			
Track 21583 and pelmet 21595			
track 21584 and pelmet 21600			
Closing time for a door of 50 Kg, stroke 1200 mm	MAXI	FACTORY SETTING	MINI
Free stroke speed*	35 cm/s (5,1 Sec.)	27 cm/s (4,5 Sec.)	24 cm/s (3,5 Sec.)
Restraint stroke speed**	2 cm/s (60 Sec.)	-	15 cm/s (8 Sec.)
** Result obtained without racks			
** Results obtained with additional racks along the entire length of 1200 mm			

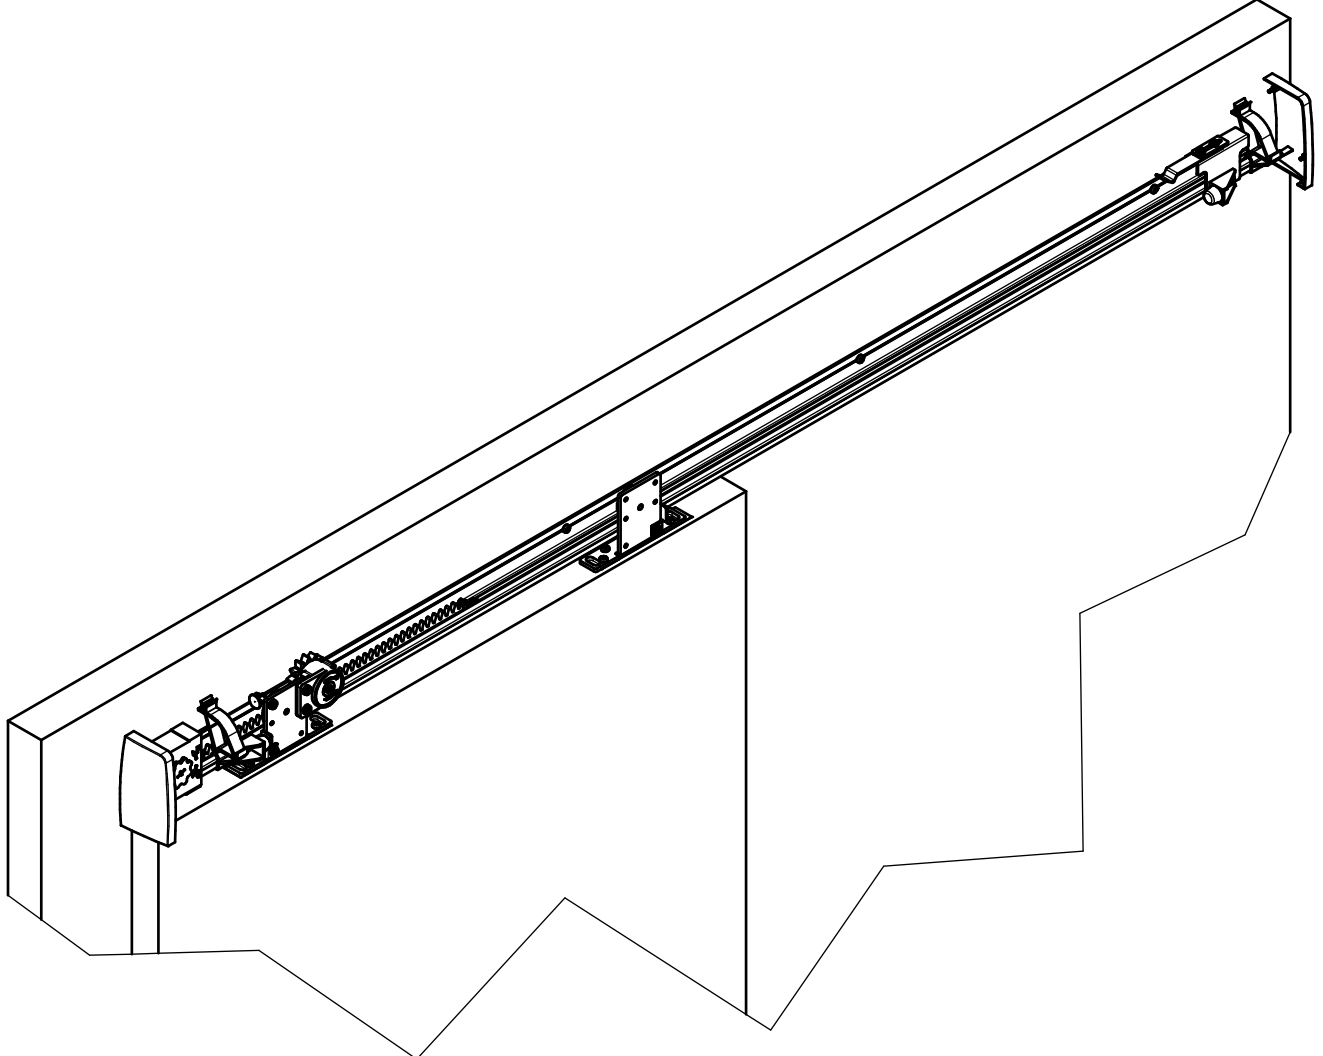

All modifications can be modified without prior notice